

SP4T Antenna Tuning Switch

Features

- High Voltage Handling, 39V
- High $P_{0.1dB}$, 42dBm
- Low On-Resistance, 1.15 Ω
- Low Off- Capacitance, 160fF
- linear performance
- Small FCQFN 1.5mm x 1.1mm x 0.37mm-10L package
- VDD=2.4 to 3.3V
- Broadband frequency range: 0.4 to 3.8 GHz

Applications

- Antenna Tuning Switch
- Band Switching
- Impedance Tuning

General Description

The AW17445 is a single-pole, four-throw (SP4T) antenna tuning switch, using CMOS silicon-on-insulator (SOI) process. The high voltage handling, high linear performance and low R_{on} and C_{off} make the switch very suitable for high performance antenna tuning application.

The AW17445 is provided very small FCQFN 1.5mm x 1.1mm x 0.37mm-10L package.

Typical Application Circuit

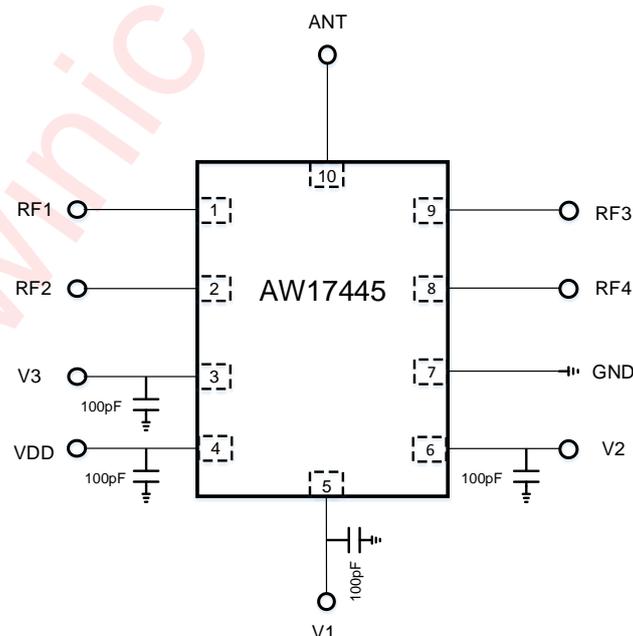


Figure 1 Typical Application Circuit of AW17445FCR

Pin Configuration And Top Mark

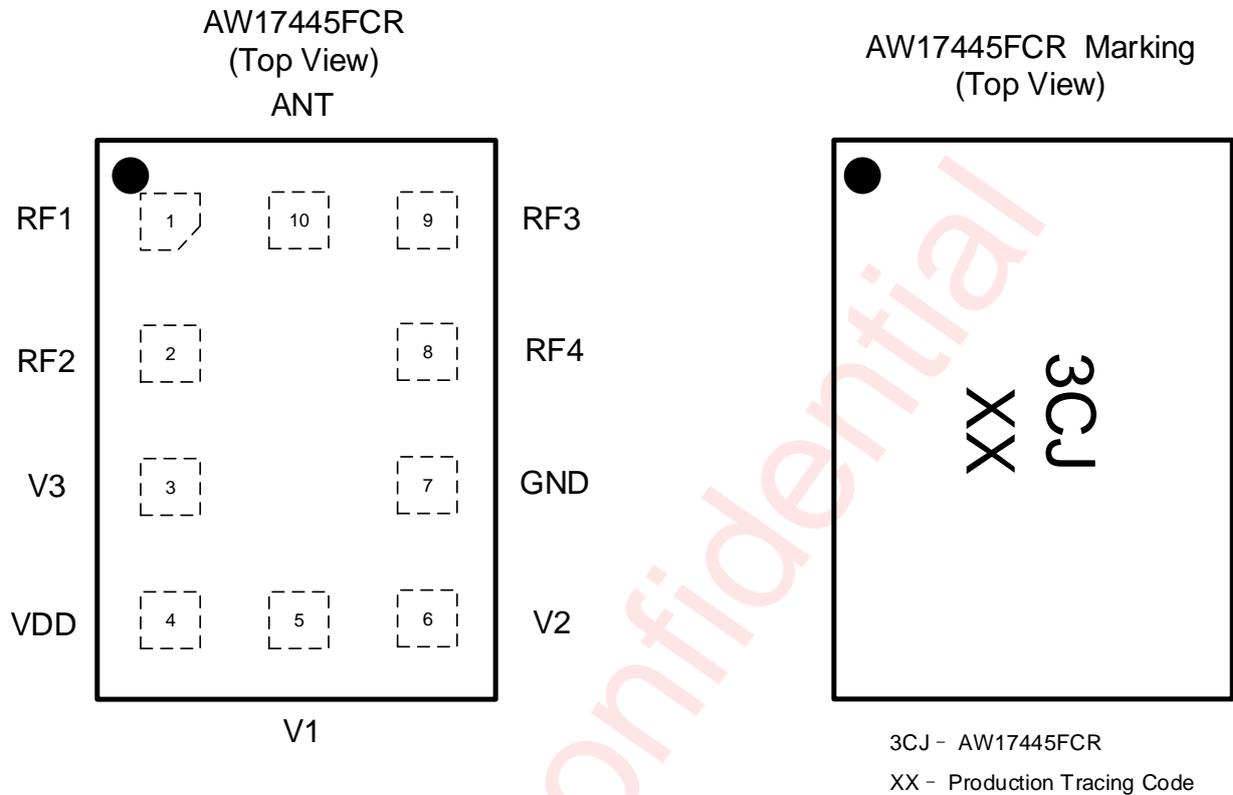


Figure 2 Pin Configuration and Top Mark

Pin Definition

No.	NAME	DESCRIPTION
1	RF1	RF1 port
2	RF2	RF2 port
3	V3	DC Control Voltage 3
4	VDD	Power Supply
5	V1	DC Control Voltage 1
6	V2	DC Control Voltage 2
7	GND	Ground
8	RF4	RF port4
9	RF3	RF port3
10	ANT	Antenna

Functional Block Diagram

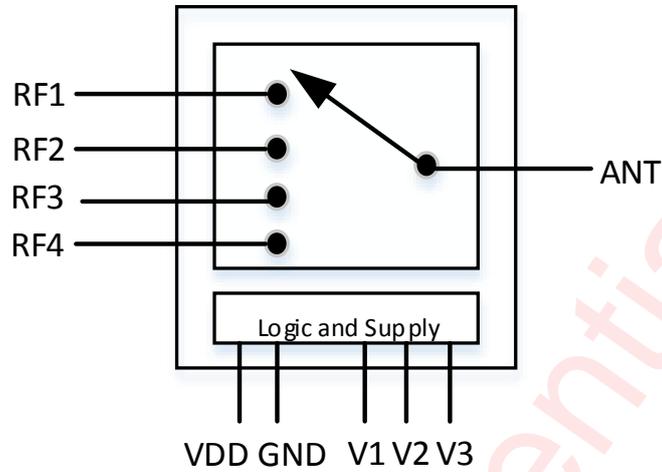


Figure 3 Functional Block Diagram

Ordering Information

Part Number	Temperature	Package	Marking	Moisture Sensitivity Level	Environmental Information	Delivery Form
AW17445FCR	-40°C~85°C	FCQFN 1.5mm x 1.1mm x 0.37mm-10L	3CJ	MSL1	ROHS+HF	4500 units/Tape and Reel

Absolute Maximum Ratings^(NOTE1)

PARAMETERS	RANGE
Supply Voltage	2.4V to 3.6V
DC Control Voltage	0 to 3.3V
RF Input Power	43dBm
Operating Free-air Temperature Range	-40°C to 85°C
Storage Temperature T _{STG}	-65°C to 150°C
Lead Temperature (soldering 10 seconds)	260°C
ESD ^(NOTE 2)	
HBM	±2000V
CDM	±500V

NOTE1: Conditions out of those ranges listed in "absolute maximum ratings" may cause permanent damages to the device. In spite of the limits above, functional operation conditions of the device should within the ranges listed in "recommended operating conditions". Exposure to absolute-maximum-rated conditions for prolonged periods may affect device reliability.

NOTE2: The human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin. Test method: ESDA/JEDEC JS-001-2017.

NOTE3: All pins. Test Condition: ESDA/JEDEC JS-002-2018

Electrical Characteristics

$V_{DD}=2.8V$, $V_1=0/1.8V$, $V_2=0/1.8V$, $V_3=0/1.8V$, $PIN=0dBm$, $VSWR=1:1$, $Temp=25^{\circ}C$. (unless otherwise noted)

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
DC Specifications						
Freq.	Operating Frequency		0.4		3.8	GHz
V_{DD}	Supply Voltage		2.4	2.8	3.3	V
V_{CTL_H}	Control Voltage High		1.3	1.8	3	V
V_{CTL_L}	Control Voltage Low		0	0	0.3	V
I_{DD}	Supply Current	$V_{DD}=2.8V$		80	120	μA
I_{CTRL}	Control Current	$V_{CTRL}=1.8V$		1	5	μA
RF Specifications						
IL	Insertion Loss	0.4 to 1.0 GHz		0.3	0.4	dB
		1.0 to 2.2 GHz		0.4	0.5	dB
		2.2 to 2.7 GHz		0.55	0.7	dB
		3.0 to 3.8 GHz		0.9	1.1	dB
ISO	Isolation	0.4 to 1.0 GHz	26	28		dB
		1.0 to 2.2 GHz	21	23		dB
		2.2 to 2.7 GHz	17	19		dB
		3.0 to 3.8 GHz	14	17		
RL	Return Loss	0.4 to 3.8 GHz	12	15		dB
R_{ON}	On Resistance	Switch Path On@1 GHz		1.15	1.35	Ω
C_{OFF}	Off Capacitance	Switch Path Off@1 GHz		160	210	fF
$P_{0.1dB}$	Input 0.1 dB compression point	0.4 to 3.8 GHz ANT to RF 1/2/3/4		42		dBm
V_{PEAK}	RFx Port Off V_{peak}	0.4 to 3.8 GHz, 25% duty cycle RF power		39	45	V
2f ₀	LTE TX Harmonics	f ₀ =400 to 3800 MHz, PIN=+26dBm		-80	-70	dBm
3f ₀				-90	-80	dBm
2f ₀	GSM LB Harmonics	f ₀ =824 to 915 MHz, PIN=+35dBm		-65	-55	dBm
3f ₀				-65	-55	dBm
2f ₀	GSM HB Harmonics	f ₀ =1710 to 2690 MHz, PIN=+33dBm		-65	-55	dBm
3f ₀				-65	-55	dBm
T_{ON}	Switching Time -ON	From 50% of V_{CTL} to 90% of final RF amplitude		3	10	μs
T_{OFF}	Switching Time -OFF	From 50% of V_{CTL} to 10% of final RF amplitude		3	10	μs

Timing Diagram (Power ON and OFF sequence)

It is very important that the user adheres to the correct power-on/off sequence in order to avoid damaging the device. The control signal V1 should be set to 0V unless VDD is set in the operating voltage range.

Power ON:

- 1) Apply voltage supply --- VDD
- 2) Set Controls---V1/V2/V3
- 3) Wait at least 20 μ s and then apply RF input

Change switch position from one RF port to another:

- 1) Remove RF input
- 2) Change control voltages V1/V2/V3 to set the switch to desired RF port
- 3) Wait at least 20 μ s and then apply RF input

Power OFF:

- 1) Remove RF input
- 2) Remove control voltages---V1/V2/V3
- 3) Remove VDD input



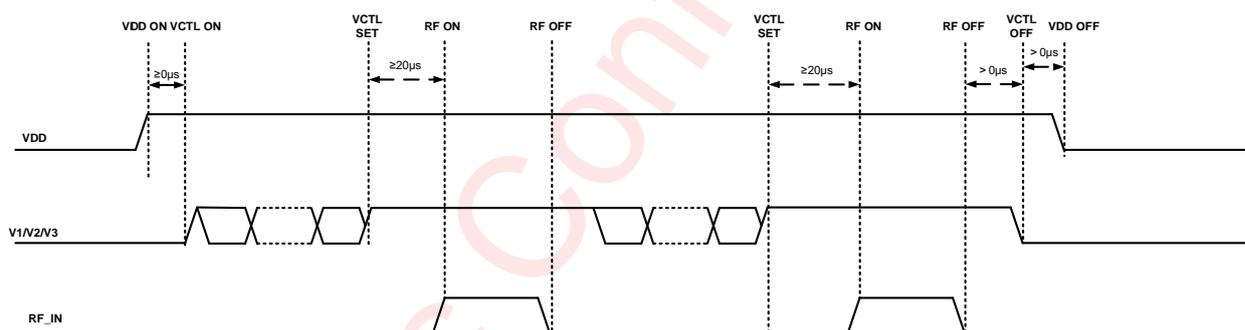


Figure 4 Power on/Change switch/Power off sequence

Truth Table

Active Path	V1	V2	V3	State
All RF On	0	0	1	1
ANT to RF1 and RF2	0	1	1	2
ANT to RF3 and RF4	1	0	1	3
ANT to RF1	0	0	0	4
ANT to RF2	0	1	0	5
ANT to RF3	1	0	0	6
ANT to RF4	1	1	0	7
All isolation	1	1	1	8

Tape And Reel Information

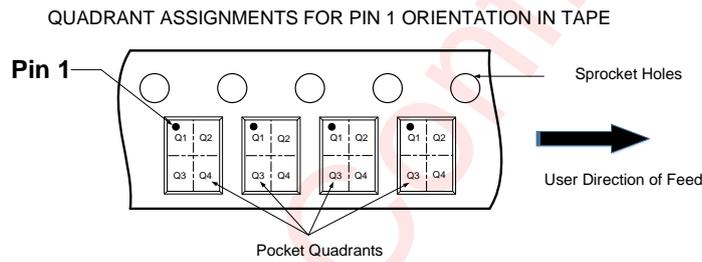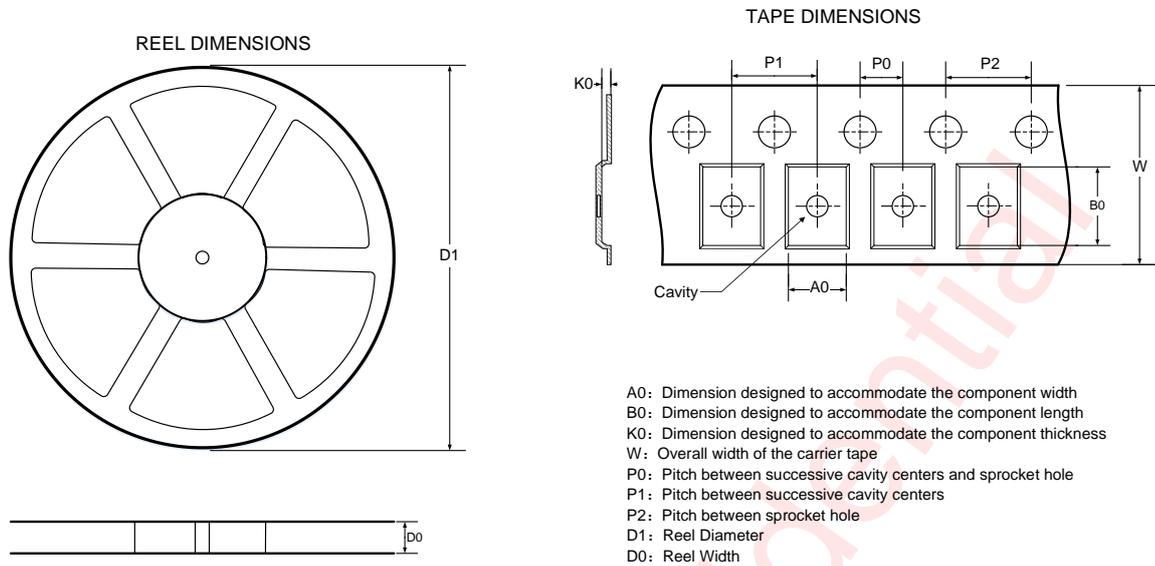


DIMENSIONS AND PIN1 ORIENTATION

D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
180	8.4	1.3	1.7	0.46	2	4	4	8	Q1

All dimensions are nominal

Figure 5 Tape and Reel




Package Description

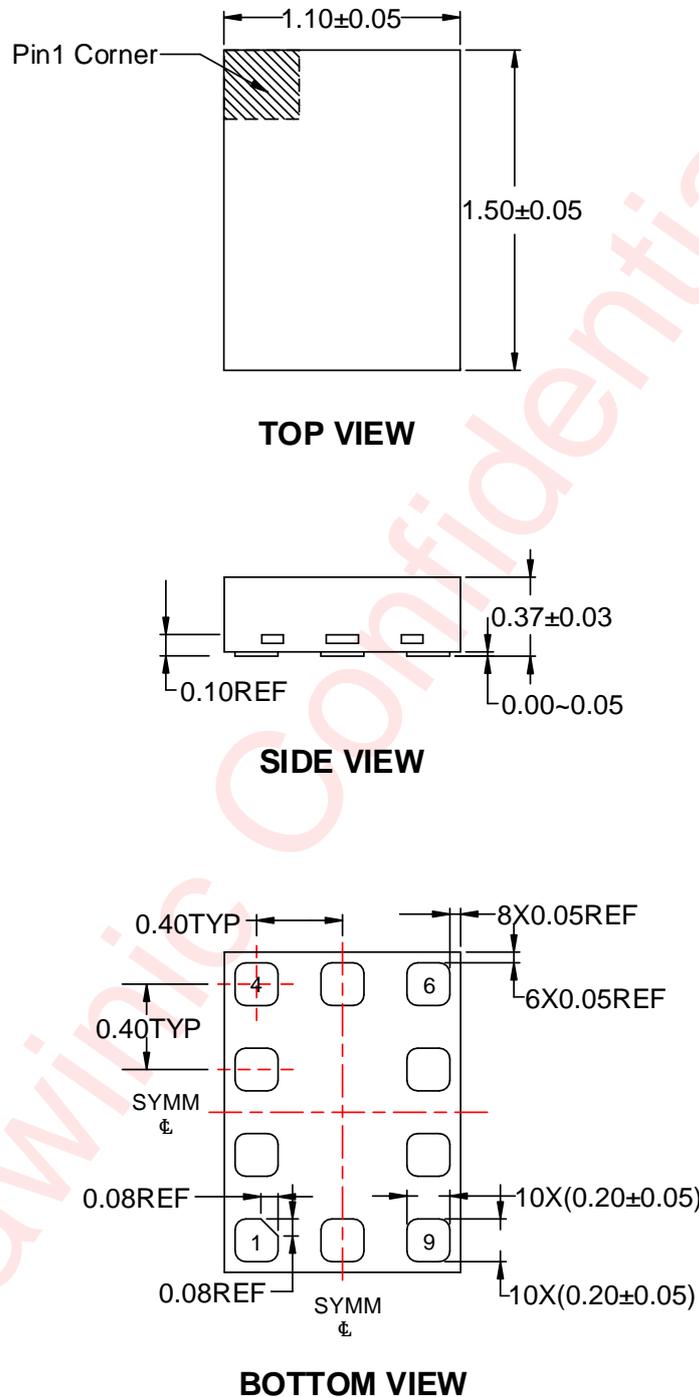

Unit:mm

Figure 6 Package Outline

Land Pattern Data

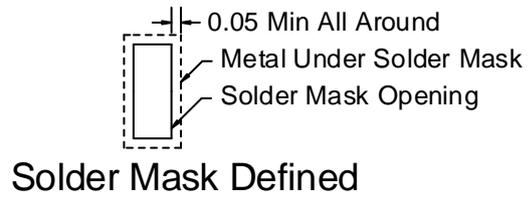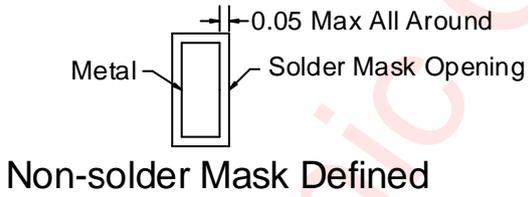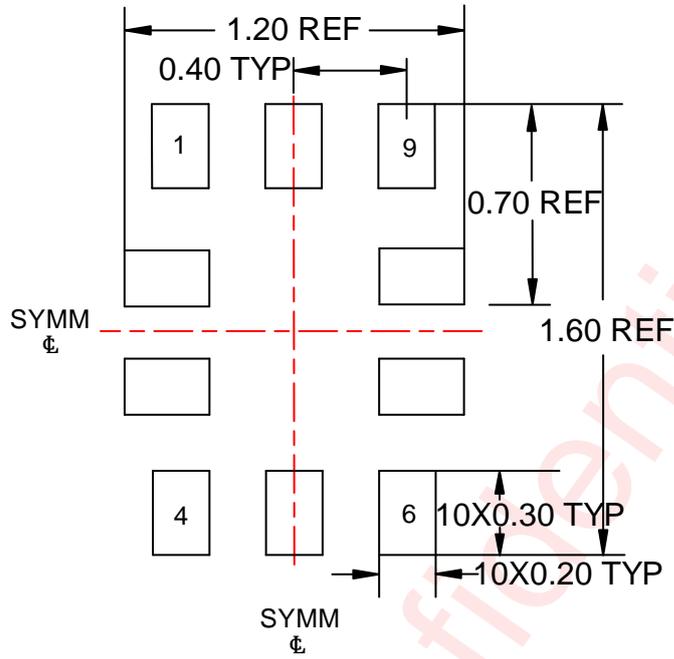

Unit:mm

Figure 7 Land Pattern Data

Revision History

Version	Date	Change Record
V1.0	Nov. 2020	Officially Released
V1.1	Mar. 2021	Update electrical characteristics

awinic Confidential

Disclaimer

All trademarks are the property of their respective owners. Information in this document is believed to be accurate and reliable. However, Shanghai AWINIC Technology Co., Ltd (AWINIC Technology) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

AWINIC Technology reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. Customers shall obtain the latest relevant information before placing orders and shall verify that such information is current and complete. This document supersedes and replaces all information supplied prior to the publication hereof.

AWINIC Technology products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an AWINIC Technology product can reasonably be expected to result in personal injury, death or severe property or environmental damage. AWINIC Technology accepts no liability for inclusion and/or use of AWINIC Technology products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications that are described herein for any of these products are for illustrative purposes only. AWINIC Technology makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

All products are sold subject to the general terms and conditions of commercial sale supplied at the time of order acknowledgement.

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Reproduction of AWINIC information in AWINIC data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. AWINIC is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of AWINIC components or services with statements different from or beyond the parameters stated by AWINIC for that component or service voids all express and any implied warranties for the associated AWINIC component or service and is an unfair and deceptive business practice. AWINIC is not responsible or liable for any such statements.